



## Hydro SS 700 ... for quiet performance and easy set-up



### SPECIFICATIONS:

Fogging Capability: Up to 5 Gallons per Hour

CFM: 980

Energy Consumption: 1.5 AMP (DF) / 1.8 AMP

Noise @ 10 ft. distance: 63 db(A) @ 10'

Weight: 10 lbs (DF) / 17 lbs

Fan Dimensions: Width 15" Depth 12"

Sump Dimensions: 11" x 13" x 7" Height






Voltages: 115 Volt 60Hz 1ph



Made in U.S.A.

### Standard Features:

- Nozzle-free, No-clog Atomization
- Compact, Lightweight with 300 Series Stainless Steel Hardware
- Adjustable Fogging Output with Particles Averaging 50 Microns
- Arrives Fully Assembled and Can Be Delivered by UPS



## Hydro SS 700-DF

### - Direct Feed Fogger

Hydro SS 700 Direct Feed is a hanging unit that has no sump. Water is supplied directly through a visual flowmeter control panel. Ideal for applications where standing water in a sump could become an issue. Since the 700-DF operates with fewer components it has cost savings and reliability advantages. Supplied with 12' of waste water drainage line. Direct Feed units require a drainage area nearby. The control packages must also include a water solenoid.

Units measure 16" Diameter x 16" Deep and are supplied with a flowmeter control panel with range up to 5 gallons per hour.



- Quiet Operation
- Stainless Steel Hardware
- Simple Garden Hose Connect
- Arrives Fully Assembled

Product Number **SS-700-DF** 115 V 60Hz 1ph

### Digital Humidistat Control - DF

A precision controller suitable for many applications. Control is very fast acting, displays humidity levels and has programmable differential range.

- Fast Acting Digital Sensor
- Range 5-99% RH
- Water Solenoid for Direct Feed
- Rated 1200W (10A @ 115V)
- Humidity & Sensor Fault Alarm

Product # **DH-36-DF** 115V 60Hz



### Jaybird Humidistat

This pre-wired humidistat is an ideal means of control for applications up to 80% RH.

*Includes water solenoid for Direct Feed*

Product # **XE-36-DF** 115V 60Hz 1ph



### Cycle Timer Control - DF




Want to maintain high humidity above 80%, then this pre-wired time-cycle control is what you may need. Select time cycles ranging from 30 seconds to 4 hours.

- Water-tight Nema 4X
- Includes water solenoid

Product Number **CTA-120-DF**

### Wall Mount



The Wall Mount Support provides adjustable height along its 30" vertical length. The cross-support extends 21", accommodating for 360° sweep rotation. Supplied with Lag bolts and masonry anchors.

–Easily install your Hydro SS Fan using one of these heavy duty supports

Product Number **XE-W**

### Ceiling Support



Support is 36" long and comes with lag bolts.



### Pocket Thermohygrometer

Ideal monitoring Humidity and Temperature.

- Displays in °C & °F

Product Number 20 - 95% RH **CP-205**


### Economy Traveling Floor Stand

- Fully adjustable boom
- 10" molded wheels

If securing Hydro SS Fans overhead is not practical, this floor stand allows for an affordable solution.

Stands are constructed of heavy-wall pipe and treated lumber.

Product Number **XE-100**

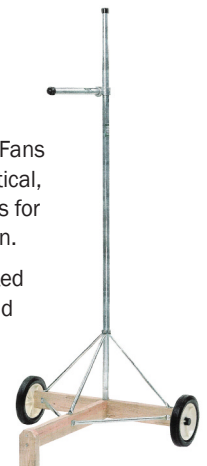

# Hydro SS 700 w/ Recirculation Sumps

## Hydro SS 700-BT

### - Bench Top Fogger

Hydro SS 700 Bench Top is a standing unit that includes a recirculation sump. Water supply is fed and maintained by a float valve and small submersible pump which feeds the atomizing fan head.

The SS 700 Bench Top has a fogging output capability up to 4 gallons per hour and is ideal for applications when hanging is not practical.

700-BT is equipped with On/Off power switch. 15' of water line and 14' power cord with plug.

Units measures:

16" W x 25" H x 20" L



- Quiet Operation
- Arrives Fully Assembled
- No Drainage Area Required
- Pivoting Fogging Head
- Simple Garden Hose Connect

**Product Number**  
**SS-700-BT** 115 V 60Hz 1ph

## Hydro SS 700-HS

### - Hanging Sump Fogger

Hydro SS 700 Hanging Sump is identical to a Bench Top unit but has the ability to be hung.

Units have all the same features of the Bench Top model but are supplied with a bracket for optional hanging.

Since fogging units generally perform better when located up high, and if practical, then this unit may be your choice.

Units measures:

16" W x 30" H x 20" L



- Arrives Fully Assembled
- No Drainage Area Required
- Stainless Steel Hardware
- Reuses its own waste water

**Product Number**  
**SS-700-HS** 115 V 60Hz 1ph

## Digital Humidistat Control


A precision controller suitable for many applications. Control is very fast acting, displays humidity levels and has programmable differential range.

- Fast Acting Digital Sensor
- Range 5-99% RH
- Rated 1200W (10A @ 115V)
- Humidity & Sensor Fault Alarm



**Product # DH-36** 100-240V 50/60Hz

## Jaybird Humidistat



This pre-wired humidistat in an ideal means of control for applications up to 80% RH.

*For Bench Top & Hanging Sump*

**Product # XE-36** 115V 60Hz 1ph

## 24 Hour Timer



This pre-wired Timer control is ideal for dawn-to-dusk applications

- Nema 3X

*For Bench Top & Hanging Sump*

**Product # TC-120** 115V 60Hz 1ph

## Cycle Timer Control




**Product Number**  
**CTA-120**

## Thermostat Control



**Product Number**  
**THA-120**

## Wall Mount



The Wall Mount Support provides adjustable height along its 30" vertical length. The cross-support extends 21", accommodating for 360° sweep rotation. Supplied with Lag bolts and masonry anchors.

**Product Number XE-C**

-Easily install your Hydro SS Fan using one of these heavy duty supports

**Product Number XE-W**

## Ceiling Support



Support is 36" long and comes with lag bolts.

## Pocket Thermohygrometer



Ideal monitoring Humidity and Temperature.

- Displays in °C & °F


**Product Number** 20 - 95% RH **CP-205**

## Economy Traveling Floor Stand

- Fully adjustable boom
- 10" molded wheels

If securing Hydro SS Fans overhead is not practical, this floor stand allows for an affordable solution.

Stands are constructed of heavy-wall pipe and treated lumber.

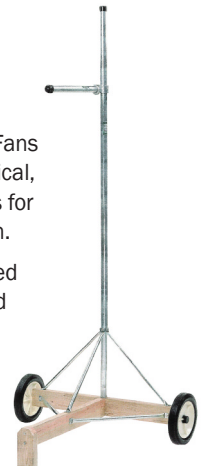

**Product Number**  
**XE-100**



## MANUFACTURER'S ONE YEAR LIMITED WARRANTY

Aquafog and accessories are warranted to the original purchaser against defects in material and workmanship under normal use for one full year from date of purchase. Any part determined to be defective and returned to the manufacturer, shipping cost prepaid, will be repaired or replaced at Jaybird Manufacturing, Inc.'s option without charge. Proof of purchase date and an explanation of the problem or complaint must accompany the returned portion of the machine.

Jaybird Manufacturing, Inc. reserves the right to verify the legitimacy of claimed defects. The provisions of this warranty do not apply to damage resulting from direct or indirect misuse, negligence, accident, lack of maintenance, or unauthorized repairs or alterations which affect the machine's performance or reliability.

**LIMITATIONS OF LIABILITY. TO THE EXTENT ALLOWABLE UNDER APPLICABLE LAW, JAYBIRD MANUFACTURING, INC.'S LIABILITY FOR DEATH, INJURIES TO PERSONS OR PROPERTY, OR FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM THE USE OF OUR EQUIPMENT IS EXPRESSLY DISCLAIMED. JAYBIRD MANUFACTURING, INC.'S LIABILITY IN ALL EVENTS IS LIMITED TO, AND SHALL NOT EXCEED, THE PURCHASE PRICE PAID. NO OTHER WARRANTY, EXPRESSED OR IMPLIED, IS AUTHORIZED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

*This warranty gives you specific legal rights,  
and you may also have other rights, which  
vary from state to state.*



Distributed by:

